



SOFTSHELL 340

2 zipped side pockets

1 zipped chest pocket

Waist adjustable drawstring

Adjustable cuffs with self-gripping fastener

Care



Composition


94% polyester, 6% elastane

100% polyester polar fleece lining

3 layers

8000 mm waterproof breathable membrane

Available colours

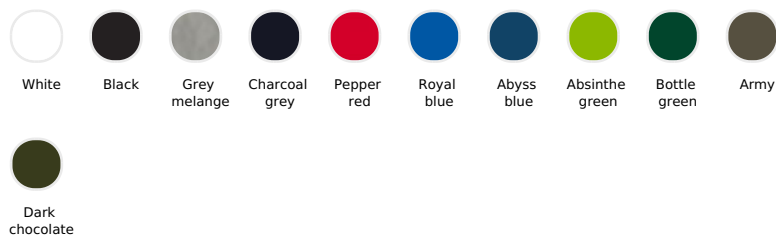

A committed product



Related products



SOL'S ROXY
46800

Available sizes



Sizes	S	M	L	XL	XXL	3XL	4XL
A/B	69/56	71/59	73/62	75/65	77/68	79/71	81/74

Packaging

Carton size : 60 x 41 x 21 cm

Weight per carton : 9.00 kg



Customisation

- **Embroidery** : This technique is generally used for personalisations that aim for a high-end finish. This technique is the most resistant to washing and use. The embroidery can be applied directly to the product or through embroidered patches. It can be done with thickness effects (with foam) or through patches that will then be affixed to the final product, allowing for variations in materials.
- **Flex** : It is the recommended marking technique for small and medium-sized series. There are several aspects: smooth, velvet, fluorescent, glitter, gold and silver. These are iron-on vinyls that are cut and glued by hot pressing. They are very well suited to a wide range of materials and substrates.
- **Screen Printing** : The most widely used technique. It consists, by the stencil method, of depositing the ink directly on the product. There are as many screens and passages as there are colours in the motif to be reproduced and all colours can be achieved. This technique makes it possible to produce very large quantities. It allows the use of inks with various effects for very different renderings and is adapted to almost all textile supports. The marking of coloured substrates requires an opacifying undercoat called « background white ».
- **Transfert** : The right technique for all materials. It is recommended for luggage, heavy garments, difficult to access surfaces. It consists of transferring the marking from a paper support to the garment by hot gluing. The marking by gluing brings rigidity to light supports at the level of the marking zone, nevertheless, the product keeps all its qualities of comfort.